




## Specifications

- European style
- 30mm or 40mm stroke
- 135.79mm shut height
- 35mm terminal pitch max
- 35mm terminal length max
- End feed
- Applicable terminal thickness is 0.6 mm max
- Overall dimensions 244(L)X101(W)X187 mm
- Weighs 5.4kg approx
- Pre-feed feeding method
- Requires 0.5-0.6 Mpa air supply

\*Specifications may vary depending on terminals size etc.

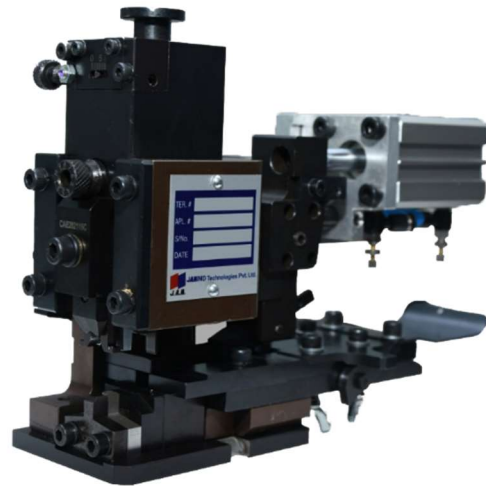

## Features

- Robust in design
- Applicable for miniature terminals
- Pneumatic feed enabling accurate feeding
- Crimp height can be adjustable up to 10 microns
- Long lasting tool life
- Suits on both Automatic and Bench top Machine

JAM applicators, recognized as global standard, have evolved constantly over decades of know-how and focus on precision and accuracy. Our applicators are designed to suit wide range of terminals made by JAM as well as other terminal manufacturers. As a 'Machine & Connector' company with long standing experience in manufacturing wide range of wire processing equipment, we understand the critical and varied 'crimp' requirements of customers. Our applicators are manufactured using high grade material, encompassing the synthesis of technological prowess, know-how and spirit of Japanese 'monozukuri' manufacturing practices.

## JAMIND Technologies Private Limited.

17 & 18, 2<sup>nd</sup> floor 7<sup>th</sup> main,

Nanjappa Garden, Kalyan Nagar,

Bengaluru. India. 560043.

Email: - jamind@jamind.in

